


# Micrometer

The origin of Mitutoyo's trustworthy brand of small tool instruments

## QuantuMike SERIES 293 — IP65 Micrometer with 2 mm/rev Spindle Feed


- Advanced pioneering technology has created the next generation of micrometer, the most revolutionary advance in micrometer technology since James Watt invented the instrument.
- Faster measurement is achieved by using a coarser thread which feeds the spindle by 2 mm per revolution of the thimble. This increase in thread lead has been made possible thanks to new high precision thread-cutting and testing techniques.

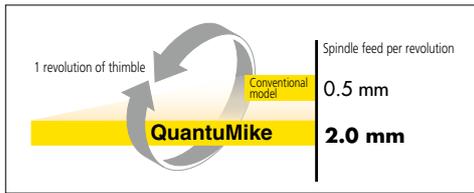

- QuantuMike is equipped with a function lock feature to prevent the origin point being moved by mistake during measurement.



- A graduated scale is provided on the sleeve for use with a reference mark on the thimble so that every millimeter displacement can be checked to provide extra confidence.



- A statistical process control system and a measurement network system can be established to share information regarding quality with a model equipped with the data output function. (Refer to page A-3 for details.)
- There is a lineup of convenient Interface Input Tools which enable the conversion of measurement data to keyboard signals and directly input them to cells in off-the-shelf spreadsheet software such as Excel. (Refer to page A-5 for details.)
- Excellent resistance against oil, water and dust (IP65 protection level) enables this product to be used in machining situations that include splashing coolant fluid.
- Measuring faces: Carbide.



Ratchet-induced microvibrations along the spindle help ensure repeatable measurements.

**MeasurLink** ENABLED  
Data Management Software by Mitutoyo



293-140-30



293-142-30



293-143-30

- The name QuantuMike is from Quantum and Micrometer, reflecting our belief this tool represents a quantum leap in micrometer ergonomics.



**IP65**

These marks indicate that a product has successfully passed IP65-level testing, which is carried out by the independent German certification organization TÜV Rheinland.

**TÜVRheinland**  
CERTIFIED

Dust- and  
Water-  
Protected

www.tuv.com  
ID 000040191

PROPRIETARY  
INSPECTION  
CERTIFICATE

An inspection certificate is supplied as standard. Refer to page U-9 for details. (Maximum measuring range up to 50 mm)

## IP Codes

Level 6: Dust-proof.

No ingress of dust allowed.

Level 5: Protected against water jets.

Water projected in jets against the enclosure from any direction shall have no harmful effects.

## Technical Data

- Dust/Water protection level: IP65 (IEC60529)\*1
- Measuring force: 7 to 12 N\*2
- Battery: SR44 (1 pc.), **938882**, for initial operational checks (standard accessory)
- Battery life: Approx. 2.4 years under normal use
- Length standard: Electromagnetic rotary sensor
- Standard accessories: Reference bar, 1 pc. (except for 0 to 25 mm (0 to 1 in) models) Spanner (**301336**), 1 pc.

\*1 Rustproofing shall be applied after use.

\*2 Measuring force when using the speeder ratchet (Apply a measuring force in the same condition as for measurement and then set the origin.)

## Functions

### Origin point setting (ABS length measurement system):

Pressing the ORIGIN button resets the ABS origin at the current spindle position. Origin values can be set depending on each size.

### Zero setting (INC length measurement system):

A brief press on the ZERO/ABS button sets display to zero at the current spindle position and switches to the incremental (INC) measuring mode. A longer press resets to the ABS measuring mode.

### Hold:

Pressing the HOLD button freezes the current value in the display. This function is useful for preserving a measurement in situations of poor visibility when the instrument must be moved away from the workpiece before the reading can be recorded.

### Function lock:

This function allows the ORIGIN (origin point setting) function and the ZERO (zero setting) function to be locked to prevent these points being reset accidentally.

### Auto power ON/OFF:

The reading on the LCD disappears after this instrument is idle for approx. 20 minutes, but the origin point is retained. Turning the spindle causes the reading on the LCD to reappear.

### Data output\*3:

Models equipped with this function have an output port for transferring measurement data to a Statistical Process Control (SPC) system.

### Error alarm:

In case of an overflow on the LCD or a computing error, an error message appears on the LCD, and the measuring function stops. This prevents an instrument from giving an erroneous reading. Also, when the battery voltage drops to a certain level, the low-battery-voltage alarm annunciator appears well before the micrometer becomes unusable.

\*3 Only for the models with SPC data output

## Optional Accessories

(Only for models with data output function)

- Connecting cables with output switch  
1 m: **05CZA662** 2 m: **05CZA663**
- USB Input Tool Direct  
**USB-ITN-B** (2 m): **06AFM380B**
- **U-WAVE-T** dedicated connection cable  
160 mm: **02AZD790B**  
For foot switch: **02AZE140B**

## Wireless Data Output U-WAVE™

- **U-WAVE-TM 264-622** (IP67 type) **264-623** (Buzzer type)
  - **U-WAVE-TMB** Transmitter  
**Mitutoyo Bluetooth® U-WAVE 264-626** (IP67 type)  
**264-627** (Buzzer type)
- Refer to page A-10 for details.
- Connecting unit for **U-WAVE-TM/TMB**  
**02AZF310** (IP67/buzzer type common specification)  
Refer to pages A-10 and A-12 for details.




## SPECIFICATIONS

		Metric					
	Order No.	Range (mm)	Resolution (mm)	Maximum permissible error $J_{MPE}$ (μm)	Flatness (μm)	Parallelism (μm)	Mass (g)
with SPC data output	<b>293-140-30</b>	0 - 25	0.001	±1	0.3	1	265
	<b>293-141-30</b>	25 - 50					325
	<b>293-142-30</b>	50 - 75		±2		2	465
	<b>293-143-30</b>	75 - 100					620
without SPC data output	<b>293-145-30</b>	0 - 25	0.001	±1	0.3	1	265
	<b>293-146-30</b>	25 - 50					325
	<b>293-147-30</b>	50 - 75		±2		2	465
	<b>293-148-30</b>	75 - 100					620

		Inch/Metric					
	Order No.	Range (in)	Resolution	Maximum permissible error $J_{MPE}$ (in)	Flatness (in)	Parallelism (in)	Mass (g)
with SPC data output	<b>293-180-30</b>	0 - 1	0.00005 in/ 0.001 mm	±0.00005	0.000012	0.00004	265
	<b>293-181-30</b>	1 - 2					325
	<b>293-182-30</b>	2 - 3		±0.0001		0.00008	465
	<b>293-183-30</b>	3 - 4					620
without SPC data output	<b>293-185-30</b>	0 - 1	0.00005 in/ 0.001 mm	±0.00005	0.000012	0.00004	265
	<b>293-186-30</b>	1 - 2					325
	<b>293-187-30</b>	2 - 3		±0.0001		0.00008	465
	<b>293-188-30</b>	3 - 4					620

## DIMENSIONS

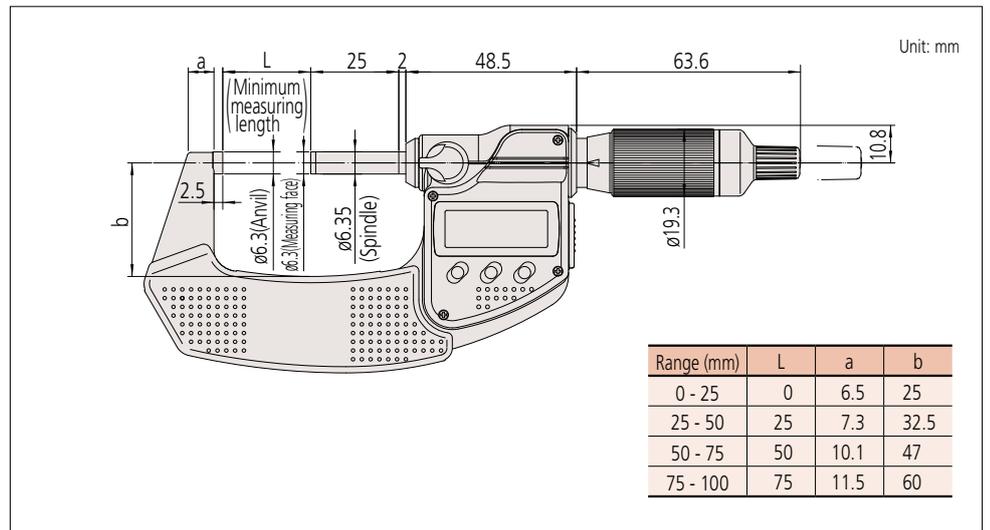

## Measuring time on a 6-stepped workpiece with one hand

Thanks to the quick movement, positioning times are reduced by 60%\* and measuring times by 35%\* compared with a conventional micrometer.

\* According to Mitutoyo's comparison test data for measuring time on typical workpieces.

