

Technical Data

- Flatness: 0.3 μm/0.00012 in
- Parallelism: 0.6 μm/0.00024 in for models up to 50 mm/2 in
1 μm/0.0004 in for models over 50 mm/2 in
- Spindle feed error: 3 μm/0.00015 in
- Dispersion of indication: 0.4 μm/0.00002 in
- Dial indication accuracy: 1 μm/0.00005 in


Standard Accessories

Reference bar, 1 pc.
(except for measuring range 0 to 25 mm (0 to 1 in) models)
Spanner (200154), 1 pc.

Workpiece Stop (optional)

- Produces more stable measurement.
- Three types are available to suit workpieces of different sizes.

Unit: mm		
Range	A	B
Workpiece stop A 04AZA124	∅16	23
Workpiece stop B 04AZA125	∅14	20.5
Workpiece stop C 04AZA126	∅14	15

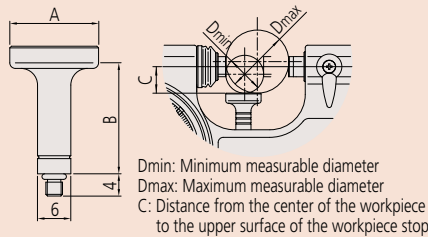

• Order No. **510-121, 510-141, 510-131, 510-151** Unit: mm

	Dmin	Dmax	C
Workpiece stop A	N/A	N/A	N/A
Workpiece stop B	4	16	5.0
Workpiece stop C	15	25	10.5

• **510-122 and 510-132**

	Dmin	Dmax	C
Workpiece stop A	25	37	15.5
Workpiece stop B	30	42	18.0
Workpiece stop C	41	50	23.5

• **510-123 and 510-133**

	Dmin	Dmax	C
Workpiece stop A	50	61	27.5
Workpiece stop B	54	66	30.0
Workpiece stop C	65	75	35.5

• **510-124 and 510-134**

	Dmin	Dmax	C
Workpiece stop A	75	87	40.5
Workpiece stop B	80	92	43.0
Workpiece stop C	91	100	48.2

**Indicating Micrometers
SERIES 510**

- Suited to the measurement of low-volume manufactured parts.
- Easy to use when operating one-handed due to retractable anvil.
- In the 25 mm measuring range, the model lineup offers a choice of left or right positioning of the anvil-retraction button.
- Greatly improved accuracy: indication error and graduation of 1 μm.
- IP protection level: 54, coolant-splash resistant during grinding process.
- Hard-coated crystal: enhanced oil and scratch resistance.
- Indicator scale is large and easy to read.
- All models come with the zero position adjustment feature.
- Measuring faces: Carbide.



SPECIFICATIONS

Metric							
Order No.	Range (mm)	Indicating range (mm)	Graduation (mm)	Dial graduation (mm)	Measuring force (N)	Anvil retraction button	Mass (g)
510-121	0 - 25	±0.06	0.001	0.001	5 - 10	Right side	520
510-141							530
510-122	25 - 50	±0.06	0.001	0.001	5 - 10	Left side	670
510-123							820
510-124	75 - 100	±0.06	0.001	0.001	5 - 10	Left side	970

Inch							
Order No.	Range (in)	Indicating range (in)	Graduation (in)	Dial graduation (in)	Measuring force (N)	Anvil retraction button	Mass (g)
510-131	0 - 1	±0.0023	0.0001	0.00005	5 - 10	Right side	520
510-151							530
510-132	1 - 2	±0.0023	0.0001	0.00005	5 - 10	Left side	670
510-133							820
510-134	2 - 3	±0.0023	0.0001	0.00005	5 - 10	Left side	970

DIMENSIONS

