

# Height Gage

MeasurLink<sup>®</sup> ENABLED  
Data Management Software by Mitutoyo

ABSOLUTE<sup>™</sup>



## QM-Height SERIES 518 — High-Performance Height Gage

- Best-in-class accuracy  $\pm(2.4 + 2.1L/600) \mu\text{m}$
- With/Without air-floating structure model. The function enables smooth movement on the surface plate.
- Easy-to-view, simple control panel enables most measurements to be made with a single keystroke.
- Eco-friendly product, operable for approximately 1,200 hours with four AA alkaline batteries. (Four commercially available nickel hydride batteries can also be used.)




### SPECIFICATIONS

Order No.	Metric	518-240	518-242	518-244	518-246
	Inch / Metric	518-241	518-243	518-245	518-247
Measuring range (stroke)		0 to 465 mm (350 mm / 14 in)	0 to 715 mm (600 mm / 24 in)	0 to 465 mm (350 mm / 14 in)	0 to 715 mm (600 mm / 24 in)
Resolution	Metric	0.001 mm/0.005 mm (Selectable)			
	Inch / Metric	0.001/0.005 mm 0.00005/0.0001/0.0002 in (Selectable)			
Accuracy at 20 °C	Indication accuracy*1	$\pm(2.4 + 2.1L/600) \mu\text{m}$			
	Repeatability*1	$2 \sigma \leq 1.8 \mu\text{m}$			
Perpendicularity*2 (20 °C)		7 $\mu\text{m}$	12 $\mu\text{m}$	7 $\mu\text{m}$	12 $\mu\text{m}$
Guiding method		Roller bearing			
Drive method		Manual (wheel)			
Measurement principle		Electromagnetic induction absolute encoder			
Measuring force		1.5±0.5 N			
Data output ports		Digimatic / USB*3			
Air-floating system		Not included	Included (for positioning only)*4		
Power supply		Alkaline AA/LR6 batteriesx4 (standard accessories)/AC adapter (optional accessory)*5 / Supports NiMH (HR6) rechargeable batteriesx4			
Battery life guidelines*6		Approx. 1,200 hours (without using the air-floating system)			
		Approx. 90 hours (when using the air-floating system)			
Mass		25 kg	29 kg	26 kg	30 kg
Dimensions (WxDxH)		Stroke 350 mm type: 280x273x784 mm Stroke 600 mm type: 280x273x1016 mm			
Operating temperature range (recommended)		0 to 40 °C (10 to 30 °C)			
Operating humidity range		20 to 80% RH (non-condensing)			
Storage temperature range		-10 to 50 °C			
Storage humidity range		5 to 90% RH (non-condensing)			



- Standard Accessories: **05HZA148**  $\phi 5$  mm stepped probe, **12AAA715** Probe diameter calibration block, Alkaline batteriesx4 (AA/LR6)
- \*1 The indication accuracy and repeatability represent the values obtained from the height measurement of a flat surface using the standard holder with  $\phi 5$  ball contact point. In the case of diameter, minimum (maximum) value, circle pitch or difference measurement, measuring errors may be larger than the accuracy ratings listed in the table due to variations in measuring force during a scanning measurement, which differs from height measurement.
- \*2 Indicates the value obtained from the measurement of a straight surface placed perpendicular to the the base reference surface using the Lever Head (**519-521**) and Mu-checker (**519-551**).
- \*3 Requires special communication driver. Consult your local Mitutoyo Sales Office for details. These can be downloaded from the Mitutoyo web site. <https://www.mitutoyo.co.jp/eng/contact/products/usb/index.html>
- \*4 When using a model with the air-floating system, it is advisable to use a JIS 1 class, or higher, surface plate. Using on surfaces with scratches or unevenness may prevent the system operating to the specified performance.
- \*5 The AC adapter cannot be used to recharge rechargeable batteries.
- \*6 Battery life depends on the operating conditions. In particular, it is more economical to use the optional AC adapter to power the instrument if the application requires prolonged use of the air-floating system.

### Measurement example

- Height measurement



- ID measurement

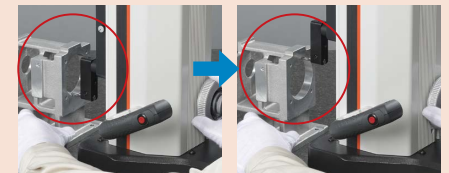

- Runout measurement

