


Point Calipers

Series 573

These point calipers have extra fine ground measuring jaws. They offer you the following benefits:

- Narrow-tip jaws fit into very small grooves and tracks, making it much easier for you to obtain many previously difficult outside measurements.

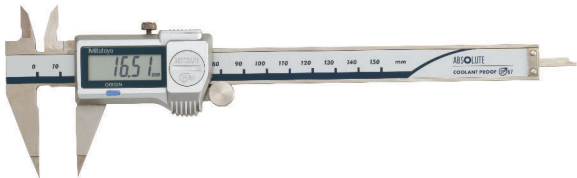


573-621-20
Fine measuring jaws

Metric Fine measuring jaws


No.	Range [mm]	Depth bar	Thumb roller	Max. Permissible Error E MPE	Max. Permissible Error S MPE	Mass [g]
573-621-20	0-150	Flat		±0,02 mm	±0,04 mm	163
573-622-20	0-150	Flat		±0,02 mm	±0,04 mm	163

Metric Pointed measuring jaws

No.	Range [mm]	Depth bar	Thumb roller	Max. Permissible Error E MPE	Max. Permissible Error S MPE	Mass [g]
573-625-20	0-150	Flat		±0,02 mm	±0,04 mm	163
573-626-20	0-150	Flat		±0,02 mm	±0,04 mm	163



Fine measuring jaws




Pointed measuring jaws

Series 536

These Vernier Point Calipers have extra fine ground measuring jaws. It offers you the following benefits:

- Narrow-tip jaws fit into very small grooves and tracks, making it much easier for you to obtain many previously difficult outside measurements.

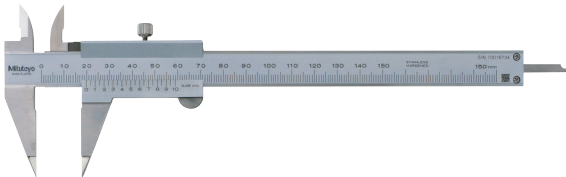

536-121
Fine measuring jaws

No.	Range [mm]	Graduation	Depth bar	Max. Permissible Error E MPE	Max. Permissible Error S MPE	Mass [g]
536-121	0-150	0,05 mm	Flat	±0,05 mm	±0,07 mm	150

Functions	Series 573
ORIGIN (ABS-Zero)	
Auto Power OFF after 20 min. non use	
Low voltage alarm	
Data output	

Specifications	
Digital step	0,01 mm
Max. response speed	Unlimited
Display	LCD, character height 9 mm
Battery life	Approx. 5 years under normal use
Delivered	In a case, including 1 battery

Optional accessories

No.	Description
05CZA624	Digimatic Cable with Data Button IP Type, 1 m, Caliper Type
05CZA625	Digimatic Cable with Data Button IP Type, 2 m, Caliper Type
06AFM380A	USB Input Tool Direct (Digimatic to USB), 2m Cable, Digimatic/Digimatic 2, with Data Button IP Caliper Type
264-620	U-WAVE fit, IP67 Type, Wireless Transmitter for Caliper
264-621	U-WAVE fit, Buzzer Type, Wireless Transmitter for Caliper
264-624	U-WAVE fit Bluetooth, IP67 Type, Wireless Transmitter for Caliper
264-625	U-WAVE fit Bluetooth, Buzzer Type, Wireless Transmitter for Caliper
02AZF310	Connection Unit for IP Caliper, Micrometer, with Data Button for U-WAVE fit, U-WAVE fit Bluetooth

Consumable spares

No.	Description
63AAA800	Battery SR44 1,5 V



Specifications	
Delivered	In a case

